

Certikin Euroswim pump - Powered by DAB



- High efficiency pump for swimming pools
- Available with outputs from 0.5HP to 3HP motor
- High capacity pre-filter. Up to 1.5HP 4 litres and up to 3 HP from 5 litres
- 2" suction and discharge ports reinforced with stainless steel rings
- Liquid temperature: up to 60 Deg C, Ambient temperature: up to 50 Deg C.
- Virtually silent running motor with reduced noise levels of 53 to 64 (LpA)
- Strainer cover in clear polycarbonate to guarantee constant visibility through time



Although a new name in the pool pump market, DAB Pumps Ltd has 35 years expertise in manufacturing pumps for a variety of different applications. Their sought-after Euroswim is a low noise, self-priming centrifugal pump with a large pre-filter basket enabling the user to empty less often and minimize maintenance. DAB Pumps offer a range of models varying from 0.5hp to 3.0hp, available in single or three phase. Three phase versions of the Euroswim are all installed with high efficiency IE2 motors and are ultra-silent.

Certikin Euroswim Pump (Powered by DAB)

Code	Description	Suction & Delivery	Phase	Voltage	Head									
					6	8	10	11	12	14	15	16	18	
EUP051	0.5HP (0.25KW) Pump	2"	1	220	16.9	14	10.1	6.8	0	N/A	N/A	N/A	N/A	N/A
EUP071	0.75HP (0.56KW) Pump	2"	1	220	19.8	17	13.8	11.9	9.7	N/A	N/A	N/A	N/A	N/A
EUP101	1HP (0.75KW) Pump	2"	1	220	23.4	20.9	18	16.2	14.1	9.5	5.9	N/A	N/A	N/A
EUP151	1.5HP (1.1KW) Pump	2"	1	220	28.9	25.8	22.8	20.9	18.5	12.6	7.8	N/A	N/A	N/A
EUP201	2HP (1.5KW) Pump	2"	1	220	33.5	31	28.4	27.2	25.4	21	18.2	14	14.2	
EUP301	3HP (2.2KW) Pump	2"	1	220	N/A	N/A	39.8	38.4	36.7	33.5	31.6	29.5	23.9	
EUP073	0.75HP (0.56KW) Pump	2"	3	380	19.8	17	13.8	11.9	9.7	N/A	N/A	N/A	N/A	
EUP103	1HP (0.75KW) Pump	2"	3	380	23.4	20.9	18	16.2	14.1	9.5	5.9	N/A	N/A	
EUP153	1.5HP (1.1KW) Pump	2"	3	380	28.9	25.8	22.8	20.9	18.5	12.6	7.8	N/A	N/A	
EUP203	2HP (1.5KW) Pump	2"	3	380	33.5	31	28.4	27.2	25.4	21	18.2	14	4.2	
EUP303	3HP (2.2KW) Pump	2"	3	380	N/A	N/A	39.8	38.4	36.7	33.5	31.6	29.5	23.9	

Fittings To Suit Euroswim Pump

R GP200SUMT 2" Socket union MT / FP £

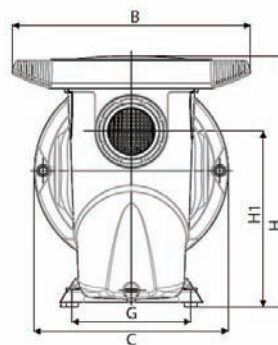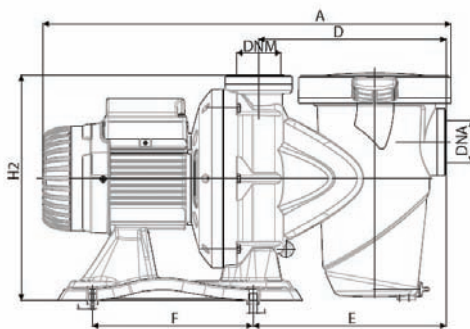

Code	Packaging Dimensions																
	A	B	C	D	E	F	G	H	H1	H2	I	L	DNA	DNM	L	B	H
EUP051	542	300	245	257	265	220	150	317	222	314	11	6.5	G2"	G2"	600	360	400
EUP071	559	300	245	257	265	220	150	317	222	314	11	6.5	G2"	G2"	600	360	400
EUP101	559	300	245	257	265	220	150	317	222	314	11	6.5	G2"	G2"	600	360	400
EUP151	581	311	290	267	274	220	150	353	258	350	11	6.5	G2"	G2"	720	350	430
EUP201	655	311	290	267	274	220	150	353	258	350	11	6.5	G2"	G2"	720	350	430
EUP301	648	311	290	267	274	220	150	353	258	350	11	6.5	G2"	G2"	720	350	430
EUP073	559	300	245	267	265	220	150	317	222	314	11	6.5	G2"	G2"	600	360	400
EUP103	559	300	245	267	265	220	150	317	222	314	11	6.5	G2"	G2"	600	360	400
EUP153	581	311	290	267	274	220	150	353	258	350	11	6.5	G2"	G2"	720	350	430
EUP203	581	311	290	267	274	220	150	353	258	350	11	6.5	G2"	G2"	720	350	430
EUP303	648	311	290	267	274	220	150	353	258	350	11	6.5	G2"	G2"	720	350	430

Certikin
brings water to life